

### FMI300-Mini electromagnetic flow meters

- Compact design saves installation space**
- Corrosion resistance sensor technology**
- All electronic design with no moving parts**
- Automatic viscosity temperature compensation**
- Pulse output/analog output is optional**
- ▶ **Low pressure loss**
- Strong anti-fouling ability**
- Air traffic control measurement function**
- Temperature resistance -40~100 degrees Celsius**



FLOW

According to Faraday's principle of electromagnetic induction when a conductor passes vertically through magnetic field B, it will induce a voltage. U In the measurement of the flowmeter, the moving conductor is a flowing conducting medium, and the magnetic field B is emitted from the direction perpendicular to the flowing medium. The induced electromotive force U on the two electrodes E1 and E2 is directly proportional to the velocity V of the medium.

$$U = K \times B \times V \times D$$

K-meter constant

D-Internal probe spacing

The induced electromotive force U is further processed and converted into a standard electrical signal for output or display


### Specifications

Measuring Range	0.04...120L/Min
Nominal diameter	DN6...DN15
Applicable medium	Liquid with conductivity > 10us /cm
Accuracy	± 1% range, 0.5% range (optional)
Repeatability	± 0.2% range
Proof pressure	16 bar
Operating voltage	24 ± 10%Vdc
Current consumption	80mA
Electrical Protection	Reverse polarity protection, short circuit protection
Output	
Pulse output	NPN output, pull up resistor 2K
Analog output	4... 20mA, current limit 26mA, load resistance < 250?
Response Time	< 500ms
Ambient Temperature	-25...85
Medium Temperature	-40...100
Materials	
Electrode	Stainless Steel 316TI
Process Connection	Stainless Steel 316TI
Measuring tube	PEEK
Seal	EPDM
HousingHousing	Stainless Steel 304
Electrical Connection	M12×1 Plug
Process Connection	G External thread, 25.4 chuck, 50.5 chuck

### Applications


- Circulating water detection
- Coolant monitoring
- Other conducting liquid monitoring

### External thread connection

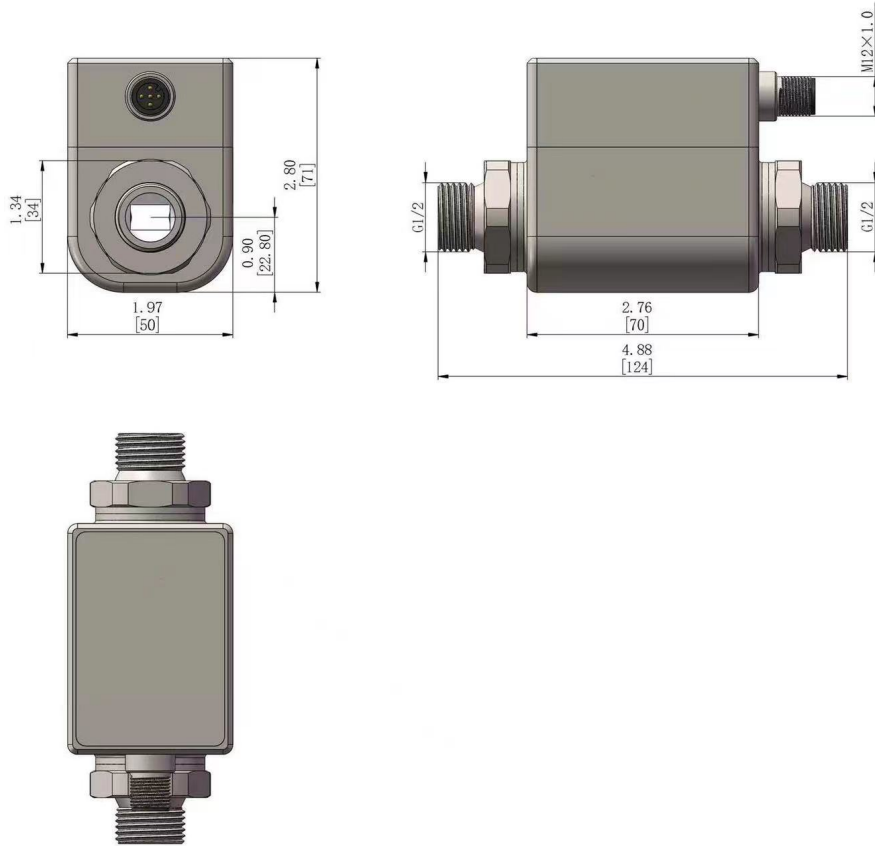

### Wiring

Signal	Plug	Cable
U+	1	Brown
U-	3	Blue
Pulse output	4	Black
Analog output (voltage or current)	2	White



Flow Range L/min

Optional procedure connection			Measuring range l/min	DN
G1/4	1/4" NPT	25.4Sanitary chuck	0.05-15	DN6
G1/2	1/2" NPT	25.4Sanitary chuck	0.2-50	DN10
G3/4	3/4" NPT	50.5Sanitary chuck	0.5-120	DN15

Model Number

OrderNO.	Type	Process connection G External thread/chuck	Measuring range L/Min	DN
FM3006	FMI300GM06	G1/4	0.04-15 L/min	6
FM3010	FMI300GM10	G1/2	0.1-50L/min	10
FM3015	FMI300GM15	G3/4	0.24-120L/min	15
FM3106	FMI300TR106	25.4 Sanitary chuck	0.04-15 L/min	6
FM3110	FMI300TR110	25.4 Sanitary chuck	0.1-50L/min	10
FM3115	FMI300TR215	50.5 Sanitary chuck	0.24-120L/min	15